






VER:01	2017.12.25			



UT-5508AD 8 AI DI TI
24


RS-485

12-24V DC
100mA@12Vmax
)r -)i
!(\$r Ž ,)
!(\$r Ž ,)
25HZ
24
0.5%
8 4
50? 120
RS-485
1200-115200(bps)
MODBUS-RTU
1KV
RS-485 600W
± 10V
0-10V 0-20mA


PWR:

TXD:

RXD:

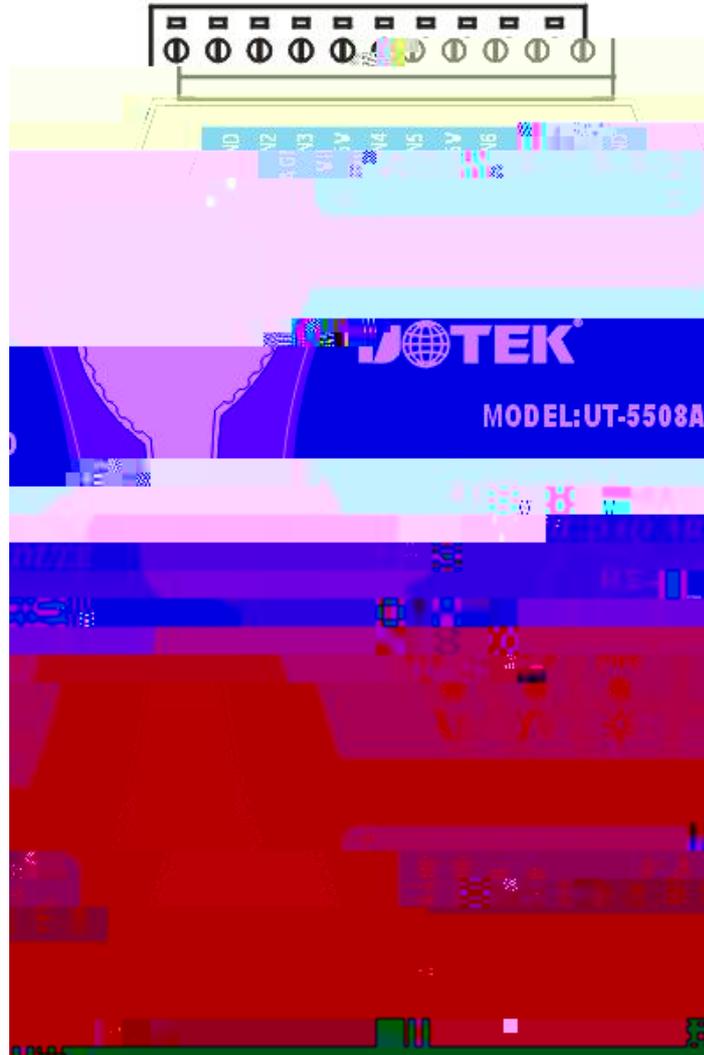

1	AGND	DI	11	AGND	DI
2	AGND	DI	12	VI N7	7
3	VI N1	1	13	VI N6	6
4	VI N0	0	14	5V	DI
5	5V	DI	15	VI N5	5
6	5V	DI	16	VI N4	4
7	DATA+	485_A	17	5V	DI
8	DATA-	485_B	18	VI N3	3
9	+VCC		19	VI N2	2
10	GND		20	AGND	DI



0x0000 40002

0x0001

40001

16



01
MODBUS
8 N 1
9600bps

1	0-10V
2	0-10V
3	0-10V
4	0-10V
5	0-10V
6	0-10V
7	0-10V
8	0-10V