



UT-2017

%

I H?
@[c

&

I H &\$%+
J9F. \$%

"

FG & & FG (,)#(&&

("

| | | | | |
|---|----------|------------|--------|------|
| 1 | EIA/TIA | RS-232C | RS-485 | |
| 2 | RS-232 | DB9 | RS-485 | DB9 |
| 3 | RS-232 | w 15KV ESD | RS-485 | 600W |
| 4 | 2500Vrms | 500DC | | |
| 5 | | | | |
| 6 | | | | |
| 7 | 38400bps | 300m | | |
| | 9600bps | 1.2Km | | |
| 8 | 63mmy | 33mmy | 17mm | |
| 9 | y | | | |



)"


RS-232C

| DB9 | / (PIN) | RS-232C |
|-----|---------|------------|
| 1 | | |
| 2 | | SOUT (TXD) |
| 3 | | SIN (RXD) |
| 4 | | DTR |
| 5 | | GND |
| 6 | | DSR |
| 7 | | RTS |
| 8 | | CTS |
| 9 | | RI |

RS-485

| DB9 | | |
|---------|------|------------|
| 1 | T/R+ | RS-485(A+) |
| 2 | T/R- | RS-485(B-) |
| 3 | N/C | |
| 4 | N/C | |
| 5 | GND | |
| 6.7.8.9 | N/C | |

*"

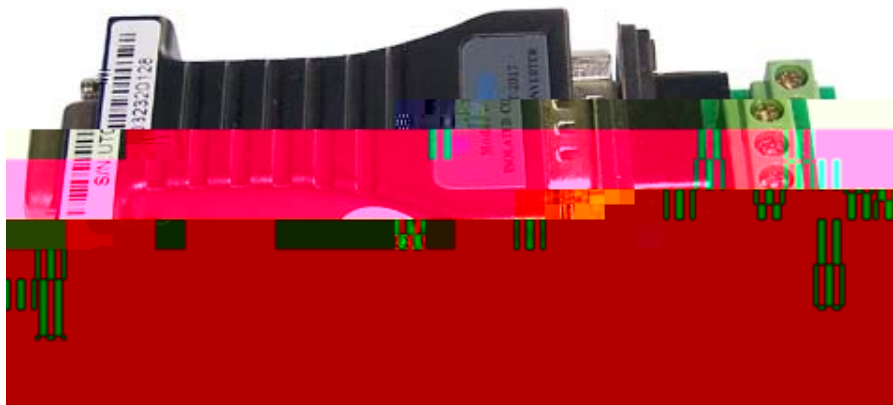



+

fl

ł

"

...

3.3r




"



%"

| | |
|--|------|
| | |
| | 1PCS |
| | 1PCS |
| | 1PCS |
| | 1PCS |

%"



& \$y %\$y *)aa

%&"

-40 +85 , 5% 95%

% " # #

%("

%)"